


# TETRA MTP3150 SAFER TOUGHER EASIER TO USE

**PRODUCT SPECIFICATIONS** 



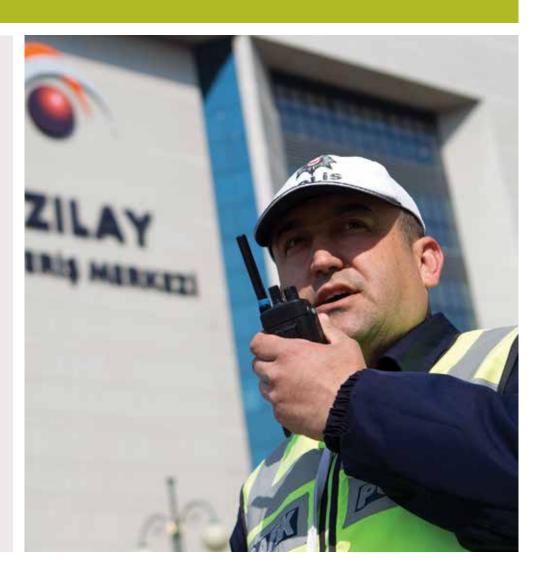

### SAFER

SUPERIOR AUDIO AND INCREASED RANGE

## **TOUGHER**

DURABLE CONNECTORS AND RUGGED DESIGN

# **EASIER**

INTUITIVE HARDWARE AND SOFTWARE FEATURES



	MTP3150
Bluetooth Capable	No
GPS Capable	Yes
AIE	No
Keypad	Full

GENERAL	
Dimensions HxWxD mm	124 x 53 x 33.5 (with standard battery)
Weight	273g (radio with 1650mAH battery and antenna)
Battery Performance (Class 4 and 1650mAH battery)	Duty Cycle 5/5/90 > 16 Hours Duty Cycle 5/35/60 > 12 Hours
Battery (Li Ion 1650mAh and 2150mAh)	

RF SPECIFICATIONS	
Frequency Bands	350-430 MHz, 800 MHz
Transmitter RF	Power Class 3L (1.8W) & Class 4 (1W)
Receiver Class	A and B
Rx Static Sensitivity	-114dBm (min); -116dBm (typical)

-105 dBm (min);

-107 dBm (typical);

ENVIRUNMENTAL SPI	ECIFICATIONS
Operating Temperature °C	-30 to +60
Storage Temperature °C	-40 to +85
Humidity	ETSI 300 019-1-7 class 7.3E
Dust and Water Ingress Protection	IP65 per IEC 60529
Shock, drop and vibration	ETSI 300-019 1-7 class 5M3; MIL-STD 810 D/E/F

LICENSES/OPTIONS	
Efficiency	
Language & Keypad Options	
DMO Repeater*	
RUA/RUI*	
MSPD*	
SCCH	
RMS*	
Call Out*	
WAP push*	
Safety	
GPS*	

SECURITY SERVICES
Authentication (Mutual)
Temporary Disable*

MAIN DATA SERVICES	
MSPD*	
SDS Messaging in TMO & DMO	
AT Commands Full Set of AT Commands (including Voice Control)	
Short Data Applications	
TNP1 Simultaneous operation of Packet Data and Short Data Services over a common Peripheral Equipment Interface (PEI)	
iTM Fleet Management (Remote Programming)	

\*SW Upgradable

Rx Dynamic Sensitivity

# THE KEY BENEFITS OF THE TETRA MTP3000 SERIES

#### **STAY IN TOUCH**

Be safer and more effective with greater coverage and in-building performance with the high-sensitivity receiver and Class 3L (1.8W) power.

#### **HEAR AND BE HEARD**

Outstanding audio means you can be safe and effective in the most noisy and difficult environments.

#### PRODUCT SPEC SHEET

TETRA MTP3150

LOCATION SERVICES	
Simultaneous Satellites	12
GPS antenna integrated into the external radio antenna	
Tracking Sensitivity	-160dBm
Accuracy	2 metre (50% probable) @ -130dBm
Protocols	ETSI LIP & Motorola LRRP

#### **USER INTERFACE**

Easy to use separate volume and talkgroup knobs

Colour Transflective Display 132x90 pixel screen with 262,144 vivid colours - viewable in bright sunlight

Flip screen and large/x-large text & icon options

Screen Saver gif image & text (any user's selection)

Universal Time Display

Multiple Languages

Keypad Lock

Talkgroup Management User friendly, flexible, efficient, fast

Talkgroups – TMO Folders 256, TMO Unique 2048, TMO Instances 4000

Talkgroups - DMO Folders 128, DMO Groups 1024

Favourite Folders Up to 3 (to store any favourite talkgroup)

Menu Tailored to user needs

Menu Shortcuts

Menu Configuration

Contacts Management Cellular Type (Rapid Search)

Contact List up to 1000 contacts up to 6 numbers per contact, max 2000 numbers

Multiple Dialling Methods user selects how to dial

Fast/Flexible Call Response - Private Call Response to a Group Call via One Touch Button

Multiple Ring Tones

Message Manager Cellular Type (Flexible)

Text message list 20

Intelligent Keypad Text Input

Status list 400

Country/Network Code List 100

Scan lists 40 lists of 20 groups

**User Controls** 

Multi-Rotary Knob Volume, List Scroll, and/or Talkgroup Selection

(The MTP3000 Series have 2 separate knobs)

One touch Buttons & Keys each button key can be programmed with one of the multiple functions available

Covert Mode

Backlight

#### MAIN VOICE SERVICES

Full Duplex TMO Private, PABX, PSTN, Emergency

Half Duplex TMO Private, Group, Emergency

Half Duplex DMO Private, Group, Emergency

Inter-MNI, Gateway, Repeater

Dialling Direct, Scroll, Speed, One touch button/key,

AlphaNumeric Search, Call History Redial

Emergency Tactical Emergency Group Call to ATTACHED talkgroup

(tailored by users) Non-Tactical Emergency Group Call to DEDICATED talkgroup

Individual Emergency Call to PREDEFINED party (half/full duplex)

HOT MIC talk without need to PTT (user enabled)

Status Msg sent to dispatch console (user enabled)

DMO to TMO enter DMO emergency (with/without gateway)

or enter TMO emergency Preemptive Priority Calls

Call Out\*

PTT Double Push

Adaptive Audio Control

#### OTHERS

Robust and 'quick connect' side connector with high-performance matching accessories

Robust bottom connector

Loud and Clear Audio -

2Wrms Audio power (4W peak) through radio and accessories

SLIM connector Accessories interface

Identification ring on antenna

A full range of matching and high performance accessories are available on the MTP3000 Series Accessory Catalogue by visiting www.motorolasolutions.com/MTP3000

\*SW Upgradable

#### **BUILT FOR A TOUGH WORLD**

Robust connectors withstand hard use and dirty environments. IP65 for all weather and water jet protection.

#### PICK IT UP AND USE IT FAST

Transition quickly from analogue radios with two control knobs. Navigate quickly through the simple user interface on the clear screen.

#### **CUSTOMISE FOR THE END USER**

Tough and effective range of audio and energy accessories suitable for the same rough use as the radio.



# TETRA MTP3150 YOUR LIFELINE WHEN TIME IS CRITICAL

For more information on the TETRA MTP3150 radio, please visit us on the web at: www.motorolasolutions.com/MTP3000

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2013 Motorola, Inc. All rights reserved. Specifications are subject to change without notice. All specifications shown are typical. Radio meets applicable regulatory requirements.



